


## 1. Light Screen Description

LIFE AQUA RGBW LIGHT SCREEN is an easy-to-install LED back light designed for aquarium tanks. Slim body design, easy to storage. You can adjust the color you like according to the needs of the scene, you can use the white light mode alone, or use the RGB and white gradient mode,

\* Install the Gradation sheet depending on your preference (both up and down sides). It also has a dimmer function which allows you to adjust the strength of the background light according to the brightness of the main lighting system.

# 2. Schematic Diagram of Light Screen

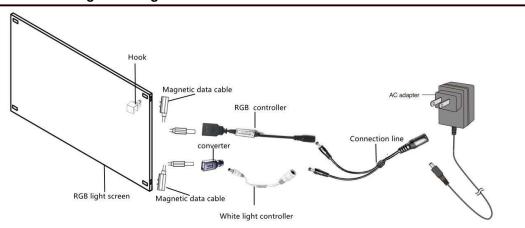

## 3. Operating Instruction

Operating Instruction on Light emitting screen

- ① Use the attached special hook and install it as shown in the figure above.
  - > The light-emitting side of the background light (the side without the LIFE AQUA logo) faces the fish tank. The background light has two mounting holes for attaching special hooks.
  - > The RGBW Light Screen is positive with the LIFE AQUA logo, the upper side is RGB light, and the lower side is white light.
  - > It can be used upside down according to specific scenario requirements.
- ② After connecting the power cord to the lamp body, insert the AC power plug into the power socket.
- ③ Use the remote control to turn on the lamp body, which can be controlled separately or a single color can be used alone.

# How to use the remote control







## 4. Safety Instruction

- > Read the following safety instructions thoroughly before using this product. A failure to adhere to the following safety instructions can result in electrical shock, fire, burns and other serious accident.
- o Do NOT disassemble nor modify this product. It can cause fire, electric shock or malfunction of the product.
- Do NOT use this product if accidentally dropped to floor. It can cause fire, electric shock or malfunction of the product.
- Use this product in the operating temperature range specified in this instruction manual. Do NOT use this product
  in a place where the product is directly exposed to sunlight, water, rain, wind or frequent vibration, or in high
  humidity. It can cause fire, electric shock or malfunction of the product.
- Avoid water. It can cause electric shock or malfunction of the product. Stop using this product immediately if the product gets wet.
- o Do NOT touch the AC adapter or Power Plug with wet hands. It can cause electric shock.
- Do NOT cover this product with any flammable materials including a cloth or paper. Do NOT use this product near flammable materials. It can cause fire.
- Do NOT insert any metals or flammable materials inside this product. It can cause fire, electric shock or malfunction of the product.
- o To prevent electric shock and injury, KEEP OUT OF REACH OF CHILDREN.
- Do NOT forcefully bend, twist or pull the Power Supply Cord. If the Power Supply Cord is damaged, it can cause fire or electric shock.
- Stop using this product immediately if the Power Supply Cord is damaged (exposed cable core, disconnection of the cord etc.) It can cause fire or electric shock.
- Keep the AC adapter away from water. It can cause fire or electric shock. In case of using an electrical outlet located below the aquarium, keep the Power Supply Cord running under the AC adapter.
- o Be cautious not to drop this product into water or off the ground.
- Keep the Light emitting screen, AC adapter, Power Supply Switch and Power Supply Plug away from water. This
  product is not waterproofed.
- o Do NOT leave the Light emitting screen directly on the floor or any places other than an aquarium tank during use.
- o The Light emitting screen becomes hot due to heat radiation during use. It is not a malfunction of the product.
- LED light of the lighting unit is not replaceable.
- Do NOT use any kind of adhesion tape on this product nor expose the product to direct sunlight. It can cause discoloration or deterioration of the product.
- o Do NOT use this product in a place with poor electrical connections. It may cause flickering light or black out.
- o Do NOT pull the Power Supply Cord while unplugging this product. Always hold the adapter when plugging it off.
- Always unplug the AC adapter or Power Plug before maintenance.
- Do NOT apply hot water of 40 or above, alcohol, paint thinner or benzene. It can cause deterioration or deformation of the product.
- Due to the nature of resin, yellowing of the Light emitting screen may occur over the course of time.

#### 5. Standard Accessories

- LIFE AQUA RGBW Light Screen x 1 - Magnetic Cable x 2 - DC 1 to 2 Connector x 1

- RGB Remote x 1 - DC/USB Converter x 2 - Hook x 2

- White Light Remote x 1 - Infrared RGB Controller x 1 - RF White Light Controller x 1

- AC Power Adapter x 1 (Asia: BS/JP/AU, Europe: EU, UK: BS)